



**The full range of reducers, couplings and bends can be equipped with the self sealed system**

## SPIRO® SHAPER


The Spiro® Shaper stands out with the efficiency to mount gaskets in a fast and accurate fashion on fittings. The focus on smaller diameter range (100 – 500 mm) results in a high output volume combined with consistency due to the precise machine set-up.

Moreover, the Spiro® Shaper can produce a rolled edge on non-gasket products. In addition, the machine handles any type of fittings (e.g. saddle, bends, T-pieces). Also, to optimize the leakage tightness, Spiro® implemented 5 different widths of rubber gaskets, covering the entire dimension range.




### Technical Data

<b>Diameter Range</b>	100 – 500 mm (4" - 20")
<b>Material Thickness</b>	0.5 - 0.9 mm (0.020" - 0.035") galvanized steel 0.5 - 0.8 mm (0.020" - 0.031") stainless steel
<b>Power Supply</b>	400V / 50Hz / 3 Phases (other voltage on request)
<b>Pneumatic Connection</b>	7 bar, 200 l/min. (as required minimum)
<b>Maximum Output</b>	4-6 pcs/min. of 2-gasket fittings (Ø160 mm)

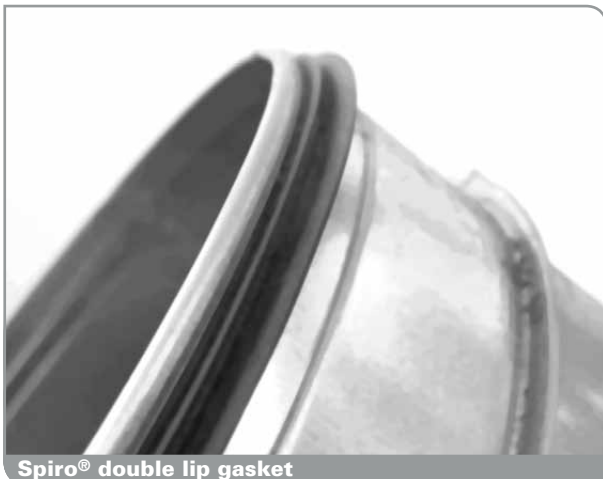

Spiro® double lip gasket

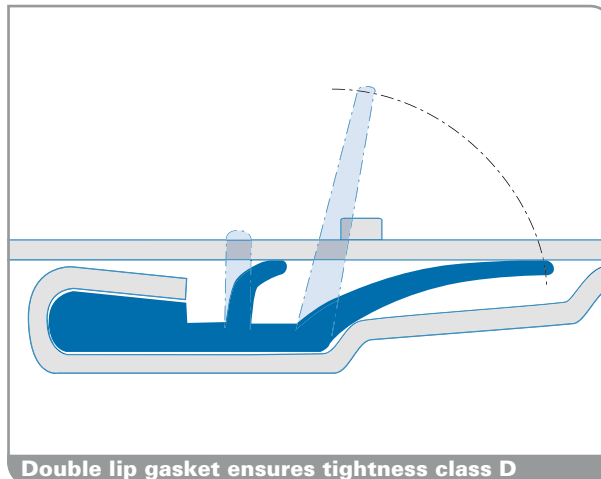

Double lip gasket ensures tightness class D